



Boccole con mantello in ottone e rivestimento in gomma

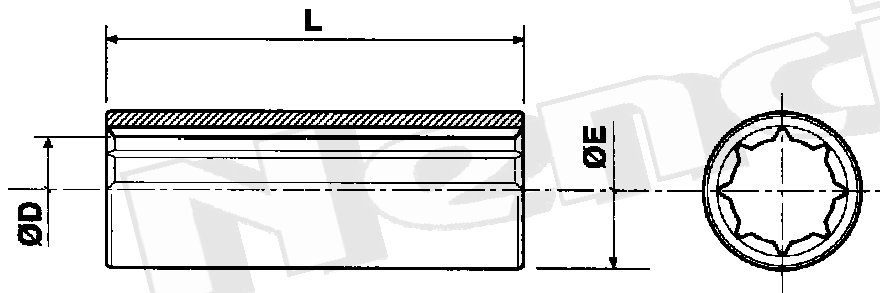

Codice	ØD	ØE	L
N30800400	20	30	80
N30800600	25	35	100
N30800800	30	40	120
N30801000	35	48	140
N30801200	40	56	160
N30801400	45	61	180
N30801600	50	66	200
N30804700	55	73	220
N30804900	60	78	240
N30805100	65	83	260
N30805300	70	90	280
N30805500	75	96	300


Codice	ØD	ØE	L
N30801700	30	40	120
N30801800	35	48	130
N30801900	40	56	140
N30802000	45	61	150
N30802100	50	66	180
N30802200	55	73	200

Boccole con mantello in ottone e rivestimento in metallo antifrizione

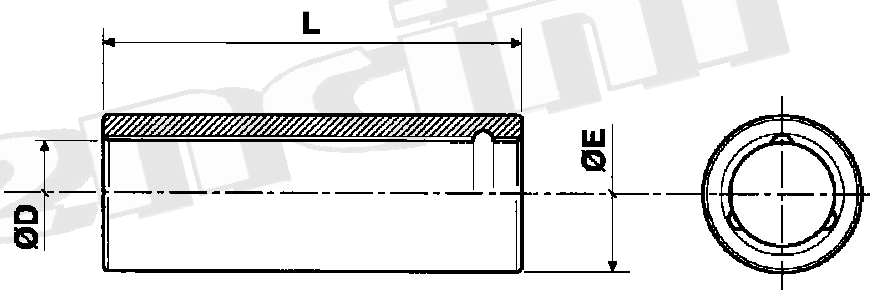


Codice	ØD	ØE	L
N30803000	20	30	80
N30803100	25	35	100
N30803200	30	40	120
N30803300	35	48	130
N30803400	40	56	140
N30803500	45	61	150
N30803600	50	66	180
N30803700	55	73	200

Boccole in tela Bakelizzata

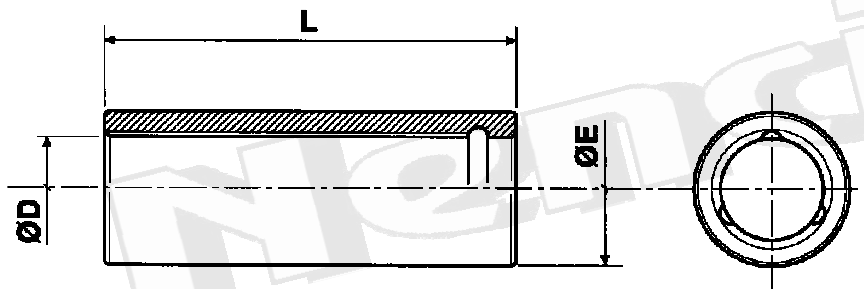

Codice	ØD	ØE	L
N30802300	25	30	120
N30802400	30	35	135
N30802500	35	40	154
N30803600	40	45	455
N30802700	45	55	185
N30802800	50	55	205

Bussole di usura per assi elica in ottone ad alta resistenza

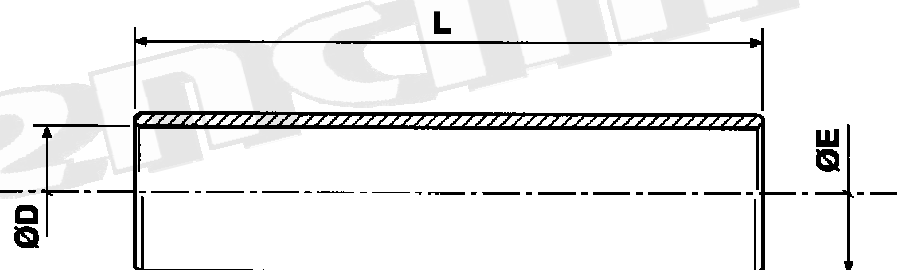

Calettare le bussole sull'asse dell'elica a caldo in corrispondenza della boccola di guida della testata poppiera